




DRWG# XASH-DA2
www.acoaus.com.au

Hermelock Access Cover: Asphalt 2

For EN124 Class D 400kN

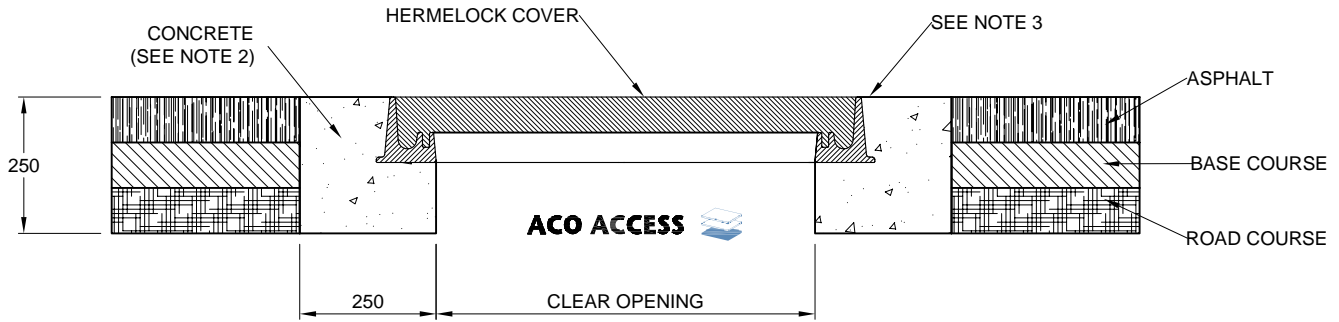

NOTES:

1. Specific site conditions may require an increase in these dimensions or reinforcement. It is the customer's responsibility to ensure the concrete encasement is designed for the application. *Engineering advice may be required.*
2. A minimum concrete strength of 25MPa is recommended. The concrete should be vibrated to eliminate air pockets.
3. The finished level of the concrete surround must be flush with the top of the frame.
4. Refer to ACO's latest installation instructions for complete details.



ACO Polycrete Pty Ltd
134-140 Old Bathurst Road
Emu Plains NSW 2750
Tel: +61 2 4747 4000
Fax: +61 2 4747 4060
e: technical@acoaus.com.au

DRWG# XASH-DA2
www.acoaus.com.au

Hermelock Access Cover

All access covers & frames are to be ACO Access Hermelock®. Covers are to be manufactured from anti-slip polyurethane with four bolts per cover. Glass reinforced frames are to contain a double hermetic seal (with a neoprene rubber seal ring)**.

The cover systems shall satisfy the requirements of EN-124, Load Class D. For sizes & part nos. refer to Drawing/Table No. _____*

* Please delete or complete where appropriate.

** Option