
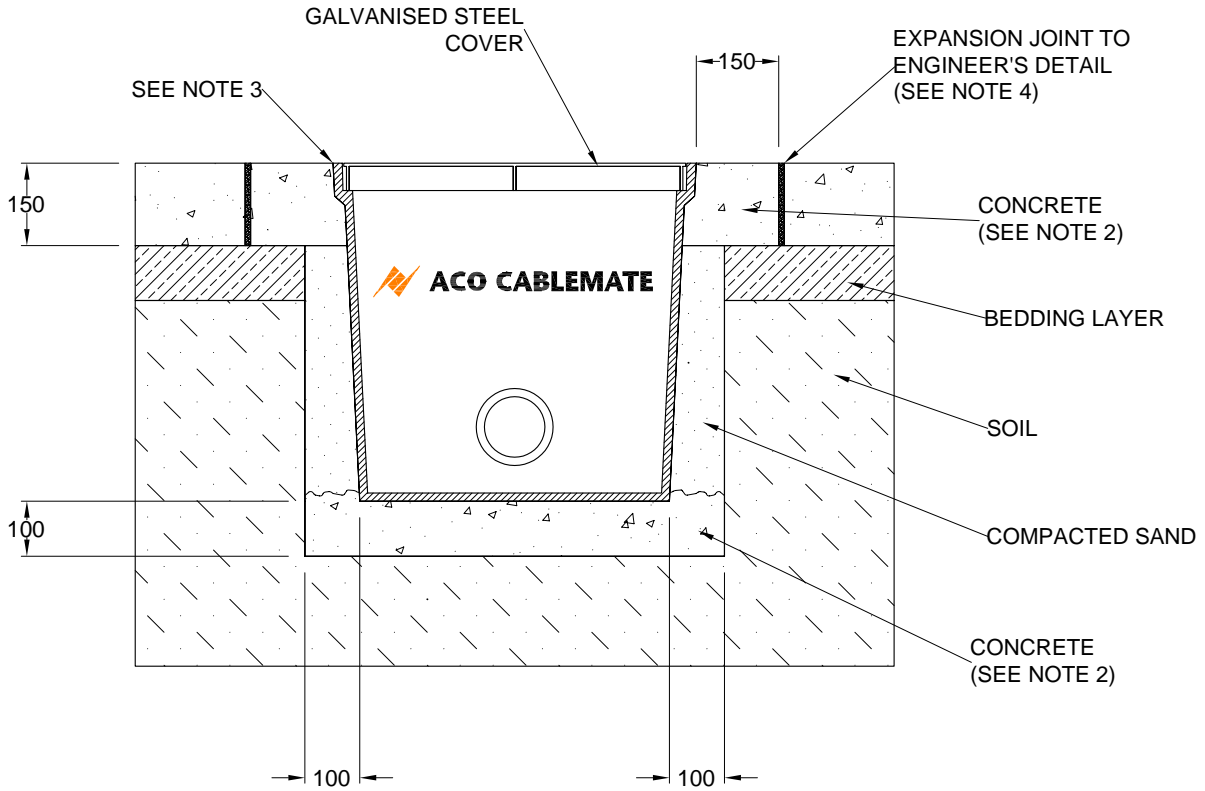
	INSTALLATION DRAWING	
DRWG# XCPG-BC	Polymer Pit with Galvanised Cover: Concrete	
www.acoaus.com.au	For 2,670kg Nominal Wheel Load	



NOTES:

1. Specific site conditions may require an increase in these dimensions or reinforcement. It is the customer's responsibility to ensure the concrete encasement is designed for the application. *Engineering advice may be required.*
2. A minimum concrete strength of 25MPa is recommended. The concrete should be vibrated to eliminate air pockets.
3. The finished level of the concrete surround must be flush with the top of the pit.
4. Expansion and crack control joints are recommended to protect the pit and the concrete surround. *Engineering advice may be required.*
5. Refer to ACO's latest installation instructions for complete details.

	SPECIFICATION CLAUSE	ACO Polycrete Pty Ltd 134-140 Old Bathurst Road Emu Plains NSW 2750 Tel: +61 2 4747 4000 Fax: +61 2 4747 4060 e: technical@acoaus.com.au
DRWG# XCPG-BC	Polymer Pit with Galvanised Steel Cover	
www.acoaus.com.au		

The electrical/communication enclosures shall be ACO Cablemate polymer concrete pit(s) *type(s) ...and part no(s)...* with Galvanised Steel cover (for 2,670kg nominal wheel load) with *clear opening(s)* and *part no(s)...*

All materials and components within the scope of this system shall be obtained from this manufacturer and the work shall be carried out as specified in accordance with the manufacturer installation recommendations.