




Brick pavers fit directly against the slot. For light duty pedestrian applications, pavers can be set on sand; for heavier duty applications, pavers should be set on concrete. Maximum paver depth 63mm to allow for 6mm bedding material is recommended.

10mm slot compliant to AS 1428.2 & AS 3996.

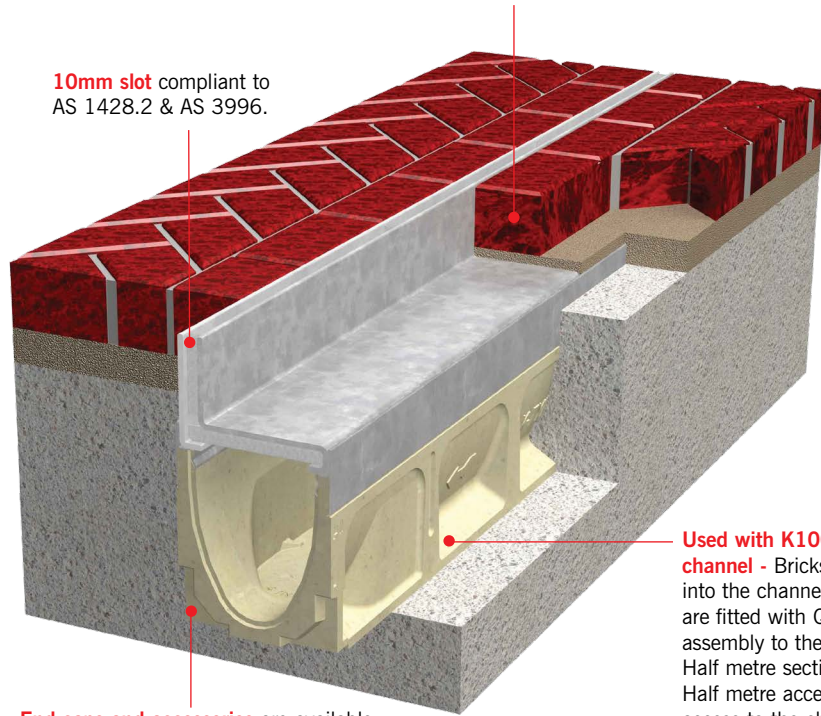

Used with K100 or H100K channel - Brickslot fits directly into the channel. Brickslot units are fitted with QuickLok for easy assembly to the channel unit. Half metre sections are available. Half metre access units provide access to the channel or in-line pit for maintenance.

End caps and accessories are available from the K100 and H100K range.



ACO DRAIN®

Brickslot Leaflet

Introduction to the Brickslot System

Brickslot - 10mm discrete slot for 100mm width channel



Brickslot

Brickslot is a discrete, drainage solution for use with brick or stone pavers up to 63mm deep. The 10mm, AS 1428.2 and AS 3996 compliant slot blends in with paving joints giving an aesthetic solution.

The Brickslot unit is typically used on the **KlassikDrain** K100 channel, but can also be used on the **SlabDrain** H100K channel if depth restrictions are a concern. An access unit provides discrete access to the channel or in-line pit for maintenance.

Brickslot is available in both galvanised and stainless steel to meet the aesthetic needs and corrosion resistance of any application.




Brickslot components	Brickslot for 100mm channel			
	Part No.		Invert mm	Weight kg
	Galv	S/S		
Brickslot (1m)	141755	141758	Channel invert + 69	6.2
Brickslot (0.5m)	141756	141759	Channel invert + 69	3.3
Brickslot access unit ¹ (0.5m)	141757	141760	Channel invert + 69	4.3
Grate removal tool	01318		-	0.1
Brickslot connector clip ²	11143		-	-
QuickLok bar	02899		-	0.1


Notes:

1. Only access cover can be removed once system has been installed.
2. Brickslot connector clip to be used at every frame joint to align the slot.


Channel with Brickslot unit




Channel with access unit - use at start of run and/or where bottom or end outlet is used for maintenance.¹



In-line pit with access unit - provides access to rubbish basket and outlet pipes for maintenance.

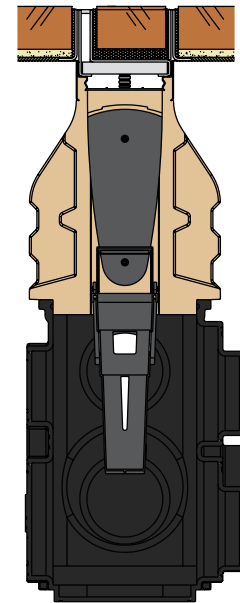

Access cover removed



Notes:

1. For long runs, space Brickslot access units at 20-30 metre intervals.

ACO Polycrete Pty Ltd

ABN 65 050 102 942

www.acoaus.com.au

Sales Hotlines

Australia 1300 765 226
New Zealand 0800 448 080
International +61 2 4747 4000
Email sales@acoaus.com.au

Technical Services

Email technical@acoaus.com.au

NSW

134-140 Old Bathurst Road
Emu Plains NSW 2750
aconsw@acoaus.com.au

WA

33-35 Sorbonne Crescent
Canning Vale WA 6155
acowa@acoaus.com.au

QLD

467 Tufnell Road
Banyo QLD 4014
acoqld@acoaus.com.au

SA & NT

14/17-19 Churchill Road North
Dry Creek SA 5094
acosa@acoaus.com.au

VIC & TAS

9 Overseas Drive
Noble Park VIC 3174
acovic@acoaus.com.au

