

TD200 4-Bolt Iron Slotted grate

Product Features



Certified to AS 3996 Load Class G (900kN)
(NATA endorsed load test reports available)



AS 3996 (Clause 3.3.7) compliant for bicycle tyre penetration resistance

- Recesses in grate fit around 'anti-shunt' lugs on the edge rail to prevent longitudinal movement
- Uses '4-bolt' locking system
- Suitable for use with TD200 channels (or H200SK channels)
- Manufactured from ductile iron to AS 1831 Grade 500-7



Specifications

The grate shall be ACO TD200 4-Bolt Iron Slotted grate with a bolted locking system as manufactured by ACO. This grate has an overall width of 238mm and overall length of 500mm. Slot widths measure at a maximum of 18mm.

Materials & Design




The grate shall be manufactured from ductile iron and have **minimum** properties and characteristics as follows:

- Recesses in grate fit around 'anti-shunt' lugs on the edge rail to prevent longitudinal movement
- Manufactured from ductile iron to AS 1831 Grade 500-7
- Certified to AS 3996 Load Class G (900kN)¹
- Meets AS 3996 (Clause 3.3.7)
- Intake area of 46,000mm² per half metre of grate

¹ NATA endorsed test reports available

For the specification of the ACO TraffikDrain channel system selected, click: <http://www.acoaus.com.au/infrastructure>

ACO INFRASTRUCTURE®
TD200 4-Bolt Iron Slotted grate

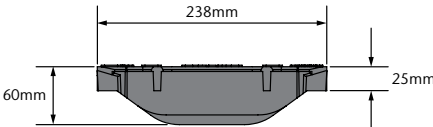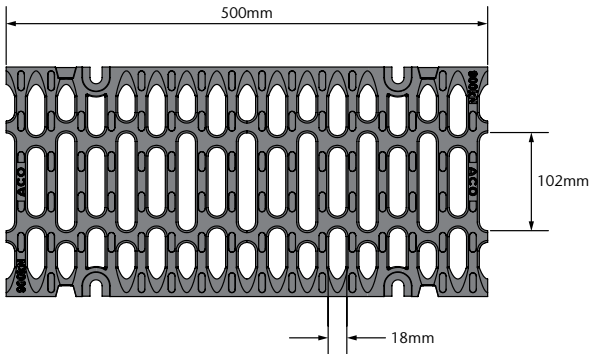

Description	Part No.	Length (mm)	Width (mm)	Weight (kg)
Bolted grate				
TD200 4-Bolt Iron Slotted (bolts included)	143343	500	238	6.1
Grate removal tool	01318	-	-	0.1
Replacement M10 x 40 bolt	2324	-	-	-

‘4-Bolt’ locking mechanism



ACO offers a 4-bolt locking solution for applications requiring more security. The four threaded stainless steel inserts in the PowerDrain channel body allow a 4-bolt grate to be bolted into the channel for ultimate stiffness and security. Tamper resistant bolts can also be used.